



FORM-16-SM-CM-RS-LP-HV

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame



PRODUCT INFORMATION - GENERAL

| | |
|-----------------------|---|
| Product Code | FORM-16-SM-CM-RS-LP-HV |
| MIC | AUA02810580001 |
| Description | Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame |
| Construction | Cast Aluminium Box with PC/Aluminium Extrusion Blade |
| Diffuser | Polycarbonate |
| Mounting | Surface Ceiling Mount, Double Sided |
| Electrical Connection | Screw Terminal |

PRODUCT INFORMATION - SPECIFICATIONS

| | |
|---------------------------|--|
| Viewing Distance | 16m |
| Operating Mode | Maintained |
| Testing System | Zoneworks XT HIVE (RF) |
| Battery | Lithium Iron Phosphate, 3.2V 1100mAh |
| Charging Method | Intelligent Current Limited Constant Voltage |
| Lamp(s)* | 18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M) |
| Supply Voltage | 220-240V~ 50Hz |
| Power Factor | 0.28 (Standby, Maintained), 0.42 (Max) |
| Supply Current | 19.91 (Standby, Maintained), 35.60 (Max) - (mA) |
| Inrush Current (Max) | 10A<144μs |
| Earth Leakage | 0.35mA |
| Power Consumption | 1.5W (Standby), 3.6W (Max) |
| Operating Temperature | 1 °C - 40°C |
| IP Rating | IP20 |
| Impact Rating | IK03 |
| Escape Route Illumination | N/A |
| AS2293 Classification | N/A |



FORM-16-SM-CM-RS-LP-HV

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP,
Zoneworks XT Hive, All Pictograms, Double Sided, Brushed
Aluminium Frame

PRODUCT INFORMATION - COMPLIANCE


| | |
|----------------------|-----------------------------------|
| Applicable Standards | AS/NZS3820, CISPR15, AS/NZS2293.3 |
| Compliance Marking | |

REPLACEMENT PARTS

| COMPONENT | PART NUMBER & DESCRIPTION |
|---|---------------------------|
| 1550150 | Battery |
| AUM02870770001 CLEDDRV2CH-RR-2C170-6C30-15-CKIT-HVEXTA | Emergency Driver |
| 8011958 | LED Strip |
| 8003182 | HV Node |

PRODUCT INFORMATION - DIMENSIONS

| | |
|----------------------------|----------------|
| Blade Assembly (LxWxH mm) | 220 x 18 x 110 |
| Body/Box (LxWxH mm) | 220 x 58 x 45 |
| Cover Plate (LxW mm) | N/A |
| Rod/Cable (LxDIAØ mm) | 1500 x 5 |
| Cut-Out (LxW mm) | N/A |
| Minimum Ceiling Depth (mm) | N/A |
| Weight (kg) | 1.30 |

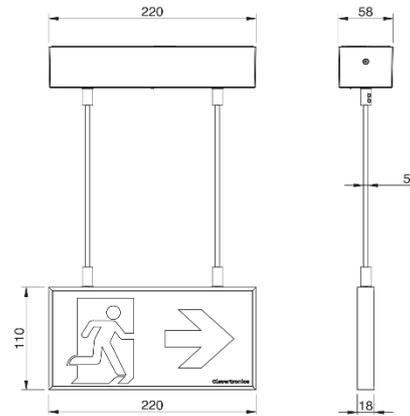

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order