

# WEATHERPROOF UNIVERSAL EXIT

## Weatherproof and Easy to Install

The Weatherproof Universal Exit offers a cost effective solution for applications that require an IP66/67 rated exit. Mounting can be either wall or ceiling with the option of single or double sided decals.

Built with a polycarbonate clear cover and nylon base that is tested to an impact rating of IK10 it is easy to see why it is a popular choice for weatherproof applications.

### Applications



Schools



Public Amenities



Factories



Stadiums



Car Parks



Warehouses

### Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available



**TRADE**  
SERIES  
THE TRADES CHOICE

**LP** LITHIUM IRON  
PHOSPHATE  
PREMIUM  
PREMIUM PROJECT PERFORMANCE

**L10** LITHIUM  
NANOPHOSPHATE®  
OPTIMUM  
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®



# WEATHERPROOF UNIVERSAL EXIT

ORDERING INFORMATION		TS ①	LP ①	L10 ①
TEST OPTIONS / PART #	Standard	EWELED-LI	CWELED	LWELED
	Clevertest / Self-Test Capable	No	Yes	Yes
	DALI	-	CWELED-DALI	LWELED-DALI
	Zoneworks® XT Hive	-	CWELED-HV	LWELED-HV
	Classic Version	-	-	LCWELED-R ②
Carton Quantity		4		
Weight - Single (Carton)		2.8kg (11.2kg)		
Dimensions (L x W x H)		410mm x 100mm x 272mm		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		

POWER, LAMPS AND BATTERY		TS	LP	L10
Power Consumption (Standby/Max)		1.1W / 2.0W	2.7W / 5.1W	
Lamp(s)		50,000 Hours LEDs	100,000 Hours LEDs	
Battery		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 600mAh	3.2V / 1500mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Construction	Cleverfit Inside Glass Reinforced Nylon Base & PC Cover
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	0°C to 40°C
Ingress Protection Rating (IP)	IP66/67
Impact Rating (IK)	IK10

ACCESSORIES	TS	LP	L10
Cantilever Bracket	CLVRBRT-CF-WP	CLVRBRT-CF-WP	CLVRBRT-CF-WP

CLASSIFICATION	TS	LP	L10
C0	E2	E2	E2
C90	E1.6	E2	E2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.  
Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.  
Spacing classifications do not apply for theatre versions.


\*Warranty information located at:  
<https://clevertronics.com.au/warranty-statement/>

## Product Configuration:

- ① Standard Version
- ② Classic Version

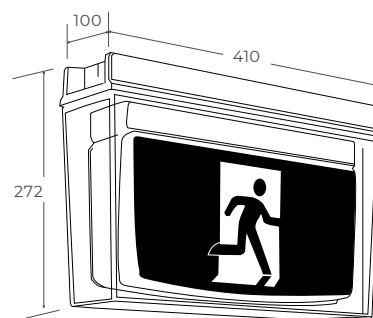

1



2

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
\_PRODUCT SHEETS – ANZ Weatherproof Universal Exit 04OCT22

