

GLIDER BLADE EXIT



Reliable & Cost Effective Blade Exit Solution

Designed to provide a reliable and cost-effective exit solution, the Clevertronics Glider Blade Exit utilises energy-efficient LED technology which provides bright, long-lasting illumination, ensuring that your building's occupants are safe during an emergency.

Available in recessed or surface mount configurations, it features a sleek and compact design that is easy to install and maintain, making it ideal for a wide range of applications.

Applications



Apartments



Car Parks



Office Buildings



Schools



Factories



Retail Outlets

CLP LITHIUM IRON
PHOSPHATE
PREMIUM
PROVEN PROJECT PERFORMANCE



Features and Benefits

- Tested to BS EN 60598-2-22
- Compliant to EN1838 and ISO7010
- Low standby power consumption
- Recessed or Surface Mount (via slide connect)
- All directional decals in one box
- DALI and Zoneworks test options available
- Clevertest Plus compatible



GLIDER BLADE EXIT

ORDERING INFORMATION	CLP RECESSED	CLP SURFACE MOUNT
Standard - White	GLIDER-LP	GLIDER-SM-LP
Standard - Black	GLIDER-LP-BLK	GLIDER-SM-LP-BLK
Clevertest Plus System Compatible	Yes	Yes
DALI	GLIDER-LP-D2	GLIDER-SM-LP-D2
Zoneworks® HIVE	GLIDER-LP-HVG	GLIDER-SM-LP-HVG
Theatre Version	-	
Carton Quantity	5	
Weight - Single (Carton)	1.15kg (6.5kg)	1.1kg (6.2kg)
Dimensions (L x W x H)	315mm x 9mm x 156mm - Blade Assembly 365mm x 95mm x 48mm - Cover Plate & Gear 335mm x 65mm - Ceiling Cut-out	315mm x 9mm x 156mm - Blade Assembly 341mm x 60mm x 60mm - Base
Directional Options	All Directional Inserts Included	

POWER, LAMPS AND BATTERY	CLP RECESSED	CLP SURFACE MOUNT
Power Consumption (Standby / Max)	2.3W/4W	2.3W/4W
Lamp(s)	100,000 Hours LED	
Battery	Lithium Iron Phosphate	
Voltage (V) / Capacity (mAh)	3.2V / 1100mAh	
Charging Method	Intelligent current limited constant voltage	


TECHNICAL SPECIFICATIONS	CLP RECESSED	CLP SURFACE MOUNT
Operating Mode	Maintained	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	
Construction - Body / Diffuser	PC & ABS / PC	
Viewing Distance	30M	
Mounting Type	Ceiling (Single or Double Sided)	Wall & Ceiling (Single or Double Sided)
Operating Temperature	0°C to 40°C	
IP Rating (IP)	IP20	

LUMINAIRE CLASSIFICATION	CLP			
Without Automatic Testing	X	1	AG	180
With Automatic Testing	X	1	AFG	180

*Warranty information located at:
<https://clevertronics.co.uk/clevertronics-uk-warranty-statement>

Product Configuration:

- 1 Recessed
- 2 Surface Mount

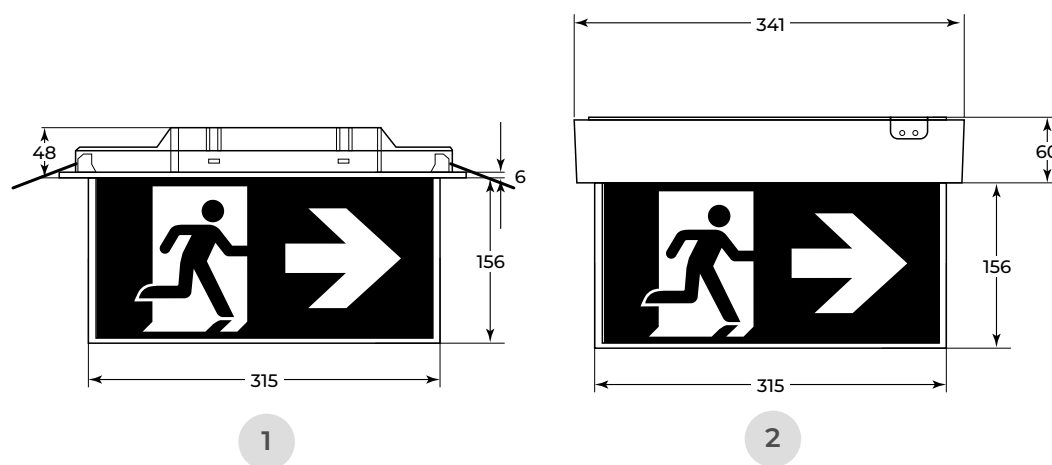

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

clevertronics.co.uk

806 Oxford Avenue, Slough Trading Estate, SL1 4LN
 Clevertronics International UK Ltd trading as Clevertronics, with registered number 11249539, whose registered office is at 843 Finchley Road London NW11 8NA. _UK Glider Blade Exit 19OCT26

