




ZXTELC-HVG

CLEVERTRONICS ZONEWORKS XT HIVE (RF) 2.4GHz EMERGENCY LIGHTING CONTROLLER (USING SSIOT)

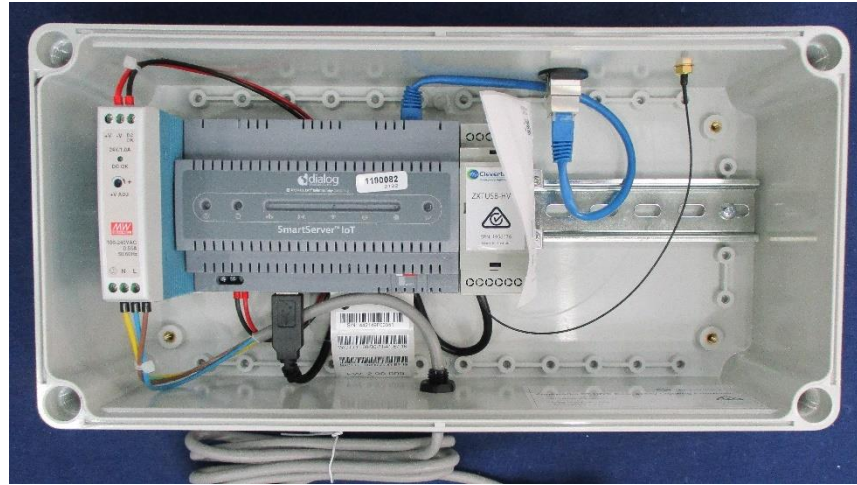

PRODUCT INFORMATION

Part Number	ZXTELC-HVG
MIC	UKL00800010002
Description	Zoneworks XT HIVE (RF) 2.4GHz Emergency Lighting Controller (Using SSIOT)
Supported Operating Systems	Win7 (32 and 64bit), Win10 (32 and 64bit), WinServer 2016 and 2019 (64bit)
Channel Types	Ethernet to RF (2.4GHz)
Ethernet Connector	RJ45 Panel Mount Connector in the Side of the Enclosure (the Ethernet Patch Lead and RJ45 Terminating Socket to the Client Network to be Supplied by the Installer)
Power Supply Interface	Supplied with a 3-core Flex (Flex can be Removed and Product Hard Wired)
Operating Voltage	220-240V AC; 50Hz
Ethernet Interface	IP Via Built-in Gigabit Ethernet (DHCP Capable and can be Used in Either Static or DHCP Mode)
Enclosure	Grey Polycarbonate Base with a Clear Polycarbonate Cover (See Image Above) and Whip Antenna
Dimensions	L=190mm, W=380mm, D=135mm
Mounting	Surface Mount Via the 4 Mounting Turrets
Power Consumption	22W, 0.15A @ 240V
Operating Temperature	-40°C to +60°C
Operating Humidity (Non-condensing)	10 to 90% RH @ 60°C

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.