



## FORM-16-REC-CM-RS-L10

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, Clevertest Plus, All Pictograms, Double Sided, Brushed Aluminium Frame



### PRODUCT INFORMATION - GENERAL

Product Code	FORM-16-REC-CM-RS-L10
MIC	AUA01310750001
Description	Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, Clevertest Plus, All Pictograms, Double Sided, Brushed Aluminium Frame
Construction	PCM Box with PC/Aluminium Extrusion Blade
Diffuser	Polycarbonate
Mounting	Recessed Ceiling Mount, Double Sided
Electrical Connection	Push Terminal
Operating Mode	Maintained
Testing System	Clevertest Plus
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Inrush Current (Peak/Duration)	10A/144µs
Earth Leakage	0.35mA
Power Consumption	1.2W (Standby), 3.3W (Max)
Operating Temperature	1°C to 40°C
IP Rating	IP20
Impact Rating	IK03
Viewing Distance	16m
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking	

### REPLACEMENT PARTS


PART NUMBER	DESCRIPTION
1530050	Battery
AUM01370530001	Emergency Driver
8011958	LED Panel



## FORM-16-REC-CM-RS-L10

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10  
Nanophosphate, Clevertest Plus, All Pictograms, Double Sided,  
Brushed Aluminium Frame

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	225 x 63 x 53
Cover Plate (LxW mm)	277 x 99
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	230 x 65
Minimum Ceiling Depth (mm)	70
Weight (kg)	1.20

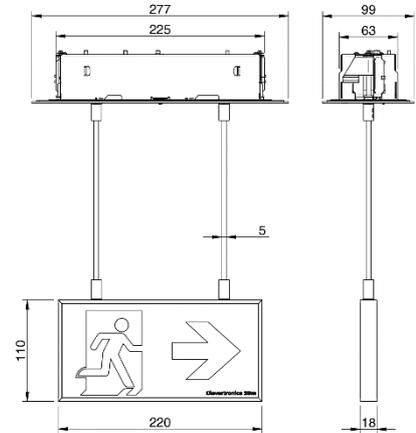

\*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order