



FORM-16-SM-CM-RS-LP

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP, Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame



PRODUCT INFORMATION - GENERAL	
Part Number	FORM-16-SM-CM-RS-LP-BLK
MIC	AUA02310990001
Description	Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP, Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame
Construction	Cast Aluminium Box with PC/Aluminium Extrusion Blade
Mounting	Surface Ceiling Mount, Double Sided
Electrical Connection	Screw Terminal
Operating Mode	Maintained
Testing System	Clevertest Plus Enabled (Not activated by default)
Battery	Lithium Iron Phosphate, 3.2V 1100mAh
Diffuser	Polycarbonate
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Power Consumption	1.5W (Standby), 3.6W (Max)
Inrush current (Peak/Duration)	10A / 144µs
Earth Leakage	0.35mA
IP Rating	IP20
Impact Rating	IK03
Operating Temperature	1°C - 40°C
Viewing Distance	16m
Escape Route Illumination	N/A
AS2293 Classification	N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking	


REPLACEMENT PARTS	
COMPONENT	PART NUMBER & DESCRIPTION
1550150	Battery
AUM02370480001	Emergency Driver
8011958	LED Strip



FORM-16-SM-CM-RS-LP

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, LP,
Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame

PRODUCT INFORMATION – DIMENSIONS	
Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	220 x 58 x 45
Cover Plate (LxW mm)	N/A
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	N/A
Minimum Ceiling Depth (mm)	N/A
Weight (kg)	1.30

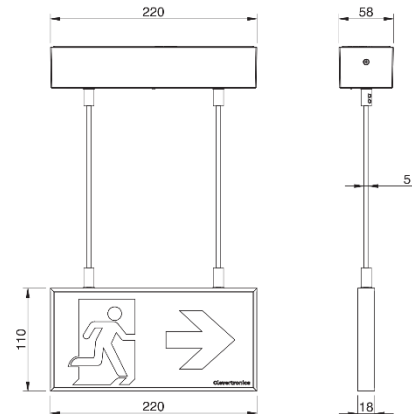

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order