



FORM-20-REC-CM-L10-HVG

Form 20M Exit, Recessed Ceiling Mount, L10, Zoneworks Hive,
All Pictograms, Double Sided, Brushed Aluminium Frame



PRODUCT INFORMATION	
Product Code	FORM-20-REC-CM-L10-HVG
MIC	UKA01810190002
Description	Form 20M Exit, Recessed Ceiling Mount, L10, Zoneworks Hive, All Pictograms, Double Sided, Brushed Aluminium Frame
Construction	PCM Box with PC/Aluminium Extrusion Blade
Diffuser	Polycarbonate
Mounting	Recessed Ceiling Mount, Double Sided
Electrical Connection	Push Terminal
Viewing Distance	20m
Operating Mode	Maintained
Testing System	Zoneworks Hive (RF) 2.4GHz
Battery	Lithium Iron Phosphate, 3.2V 1100mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, 170,000 hours
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Power Consumption	1.5W (Standby), 3.6W (Max)
Inrush Current (Peak/Duration)	10A/144µs
Earth Leakage	0.35
Operating Temperature	0°C to 40°C
IP Rating	IP20
Impact Rating	IK03
Rated Emergency Duration	180 Minutes
Luminaire Classification	X 1 AG 18 0
Conformity	BS EN 55015, BS EN 61547, BS EN 61000-3-2, BS EN 61000-3-3, ETSI EN 301 489-1, ETSI EN 301 489-17, BS EN 1838, BS EN ISO 7010, BS EN 62471, BS EN 60598-2-22
Compliance Marking	




FORM-20-REC-CM-L10-HVG

Form 20M Exit, Recessed Ceiling Mount, L10, Zoneworks Hive,
All Pictograms, Double Sided, Brushed Aluminium Frame

DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	238 x 79 x 52
Rod/Cable (LxDIAØ mm)	N/A
Cut-Out (LxW mm)	230 x 65
Minimum Depth (mm)	70
Weight (kg)	0.70
Blade Assembly (LxWxH mm)	220 x 18 x 110

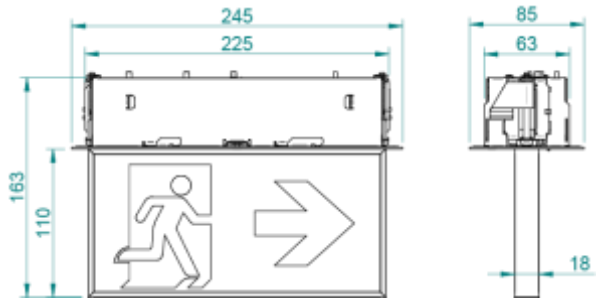

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533050	Battery
8011956	LED Assembly
UKM01870370002	Emergency Driver
8003345	Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order