




## LLIFE-PRO-HVG

Lifelight Pro Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive

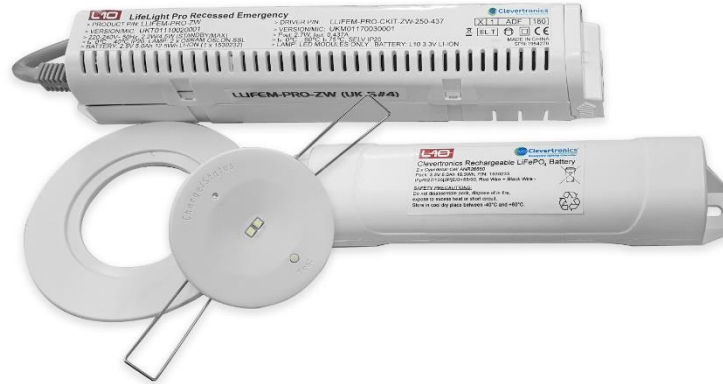

PRODUCT INFORMATION	
Part Number	LLIFE-PRO-HVG
MIC	UKT01810020003
Description	Lifelight Pro Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive
Construction	PC/ABS Head, double/reinforced insulation between supply and battery circuit of lamp control gear
Dimensions L x W x H	232mm x 40mm x 40mm (Control Pack) 60mm Head Diameter (95mm with adaptor plate)
Ceiling Hole Cut-Out	51mm, 85mm (with adaptor plate)
Minimum Ceiling Depth	200mm, 120mm (with adaptor plate)
Weight	0.6kg
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery Type & Manufacturer	Lithium Nanophosphate (LiFePO <sub>4</sub> ), Clevertronics
Charging Method	Intelligent current limited constant voltage
Lamp(s)	2 x LED
Operating Voltage	220-240V AC; 50Hz
Power Consumption	0.7 Watts (Standby), 3.0 Watts (Max)
Inrush Current (Max)	14.0A, 77us
Earth Leakage	N/A
Total lumen output	357lm (Emergency)

\*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.



## LLIFE-PRO-HVG

Lifelight Pro Emergency, Recessed Mount, L10 Nanophosphate,  
Zoneworks XT Hive

### PRODUCT INFORMATION

Rated Emergency Duration	180 minutes				
IP Rating	IP20				
Maximum Case Temperature (TC)	50°C (no heatsink required for lamp controlgear)				
Operating Temperature	0°C to 40°C				
Protection	<ul style="list-style-type: none"><li>• Battery overvoltage &amp; overcurrent protection</li><li>• Battery deep discharge protection</li><li>• Supply voltage polarity reversal protection</li><li>• Battery short-circuit protection (charging will resume upon removal of fault)</li><li>• Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts</li></ul>				
Luminaire Classification	<table border="1"><tr><td>X</td><td>0</td><td>ADF</td><td>180</td></tr></table>	X	0	ADF	180
X	0	ADF	180		
Conformity	BS EN 60598-2-22, BS 5266				

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533232	Battery
1100897	LED Head
UKM01870050002 LLIFE-PRO-CKIT-HVG	Driver Pack
8003330	HIVE Node

\*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.