



## FORM-16-SM-CM-RS-L10-HV-BLK

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided, Satin Black Frame



### PRODUCT INFORMATION - GENERAL

Product Code	FORM-16-SM-CM-RS-L10-HV-BLK
MIC	AUA01811060001
Description	Form 16M Exit, Surface Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided, Satin Black Frame
Construction	Cast Aluminium Box with PC/Aluminium Extrusion Blade
Diffuser	Polycarbonate
Mounting	Surface Ceiling Mount, Double Sided
Electrical Connection	Screw Terminal

### PRODUCT INFORMATION - SPECIFICATIONS

Viewing Distance	16m
Operating Mode	Maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Inrush Current (Max)	10A<144μs
Earth Leakage	0.35mA
Power Consumption	1.5W (Standby), 3.6W (Max)
Operating Temperature	1°C – 40°C
IP Rating	IP20
Impact Rating	IK03
Escape Route Illumination	N/A
AS2293 Classification	N/A



## FORM-16-SM-CM-RS-L10-HV-BLK

Form 16M Exit, Surface Ceiling Mount, Rod Suspended, L10  
Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided,  
Satin Black Frame

### PRODUCT INFORMATION - COMPLIANCE


Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking	

### REPLACEMENT PARTS

COMPONENT	PART NUMBER & DESCRIPTION
1530050	Battery
AUM01870790001	Emergency Driver
8011958	LED Strip
8003182	HIVE Node

### PRODUCT INFORMATION - DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	220 x 58 x 45
Cover Plate (LxW mm)	N/A
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	N/A
Minimum Ceiling Depth (mm)	N/A
Weight (kg)	1.30

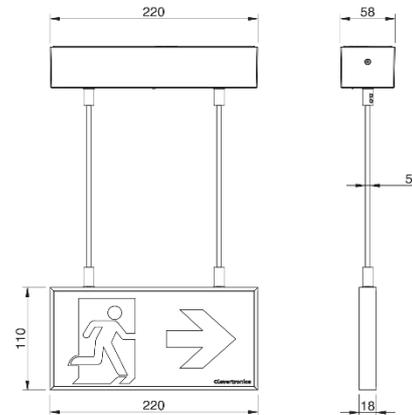

\*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order